

CDS1210 analog output – Measurement range 0 up to 10 000 mm

Specifications


Measurement range	0 up to 10 000 mm
Output signal	0...10V (galvanic isolation) 4...20mA current loop 4...20mA current generator (galvanic isolation) 0...20mA current generator (galvanic isolation)
Resolution	Quasi infinite (depends on the operating system)
Material	Body and cover - aluminium (RohS) Measuring cable - Stainless steel
Cable diameter	0,90 mm
Detection element	Multi-turn Hybrid potentiometer
Connection	Male connector M16 - DIN 8 pin Male connector M12 - 4 pin PVC cable - 4 wires
Standard linearity	+/- 0,15% f.s. +/- 0,10% f.s. (optional)
Protection class	IP65
Max. Velocity	10 M/S
Max. Acceleration	5 M/S ² (before cable deformation)
Weight	≈ 6 kg
Operating temperature	-20° to +80°C
Storage temperature	-30° to +80°C



Cable forces

Measurement range in mm	Min. pull-out force	Max. pull-out force
10 000	≈ 11,00 N	≈ 13,50 N

Ordering reference

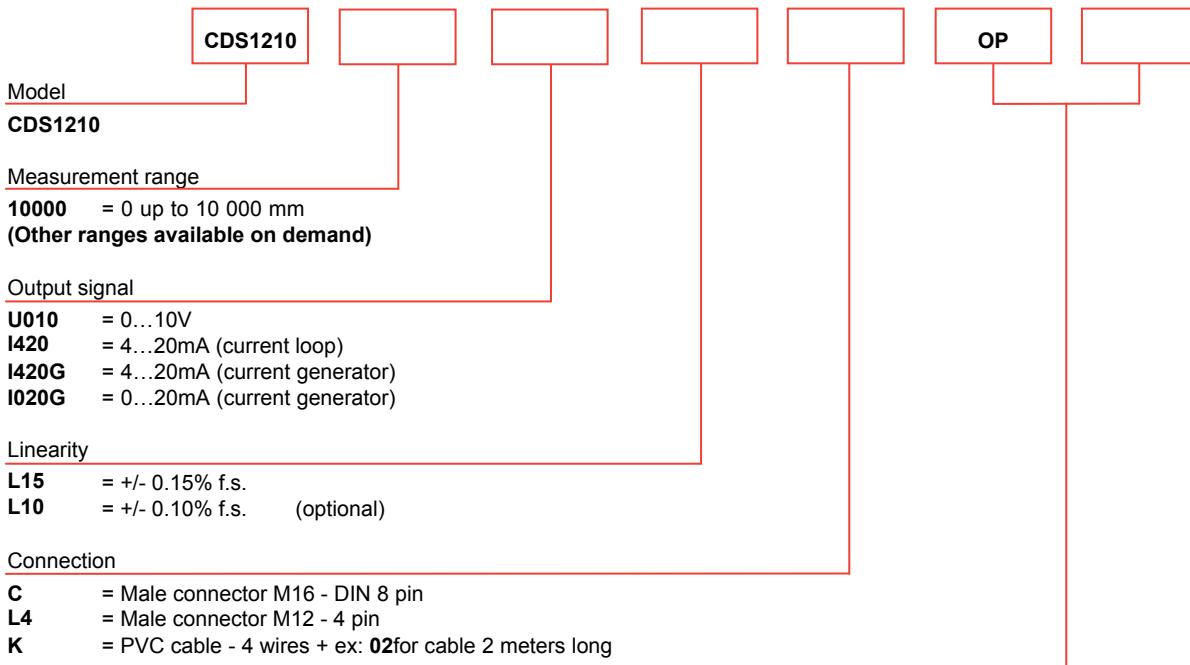

OP Options



- AC = Complete anodizing
- BR = Cleaning brush for the cable
- BT = Low temperature (down to -30°C)
- CP = Fixing of the measuring cable with a clevis
- IP67 = Protection class IP67
- M6 = Fixing of the measuring cable with a M6 threaded rod
- TEV = Water evacuation holes + ex. 180for 180° holes (see the options page for further details)

Reference example: CDS1210-10000-U010-L15-K02-OP-AC-M6

Electrical characteristics



Analog version 0 ...10V

Input voltage	15 to +27 Vdc (52mA max)
Output voltage	0 to 10 Vdc
Output current	10mA max
Galvanic isolation	3KV
Protection	- Short circuit - Polarity reversal
Temperature drift	+/-100 ppm/°C

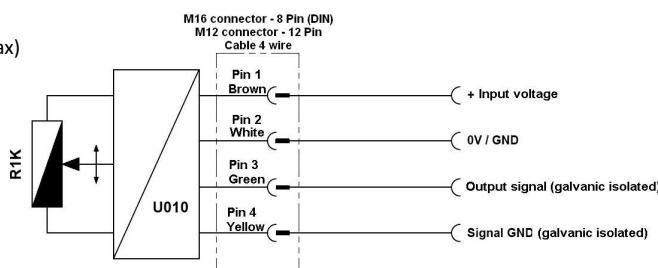



Analog version 4 ...20mA : (Current loop)

Input voltage	+15 to +27 Vdc (32mA max)
Output current	4 to 20mA
Protection	- Short circuit - Polarity reversal
Temperature drift	+/-100 ppm/°C


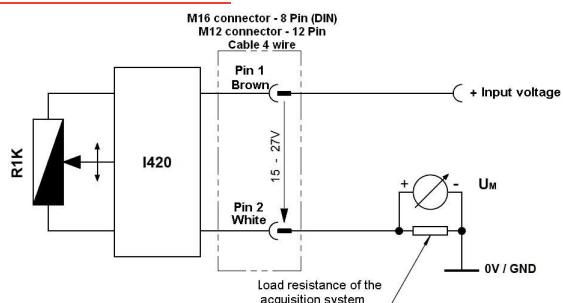


Analog version 4...20mA or 0...20mA : (Current generator)

Input voltage	+15 to +27 Vdc (75mA max)
Output current	4 to 20mA or 0 to 20mA
Output current	22 mA max.
Galvanic isolation	3KV
Protection	- Short circuit - Polarity reversal
Temperature drift	+/-100 ppm/°C

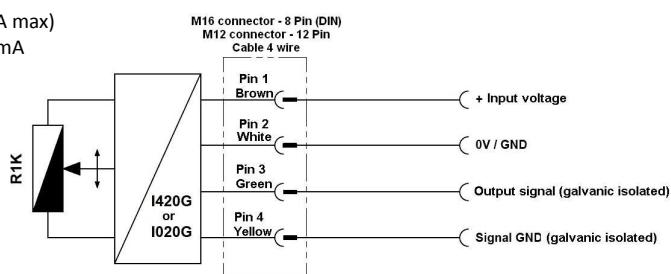

Connection


Male connector M16 8 pin (DIN)	Male connector M12 4 pin (DIN)	PVC cable 4 wire	010V	I420 (current loop)	I420G or I020G (current generator)
1	1	Brown	Input voltage +	Signal +	Input voltage +
2	2	White	Input voltage GND	Signal -	Input voltage GND
3	3	Green	Signal +		Signal +
4	4	Yellow	Signal GND		Signal GND
					
Sensor side view	Sensor side view				

Options

Cable attachment head

Standard

Measuring cable attachment with a lug.




Cable attachment fitted with a M6 threaded rod

OP-M6

The rod attachment uses a threaded rod with 2 nuts (provided).

The required thickness of the plate does not exceed 5 mm.

The attachment mounted on ball bearings allows a free rotation relative to the measurement cable.




Cable attachment with a clevis

OP-CP

The attachment of the clevis is done using a pin (provided).


The attachment mounted on ball bearings allows a free rotation relative to the measurement cable.

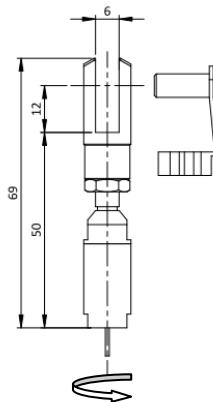

Cleaning brush for the cable

OP-BR


The cleaning brush wipes the cable in dusty or humid environments.

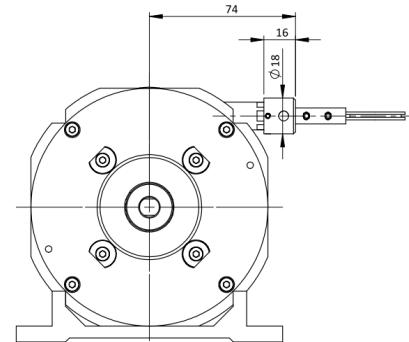


Water evacuation holes

OP-TEV



The holes allow the natural flow of fluids out of the sensor in order to avoid their accumulation in the system.




Please specify the implantation angle of the drain holes on the drawing below.
(All value between 0 and 360°)

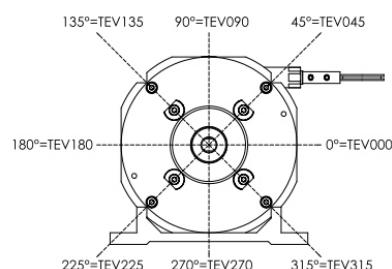


Dimensional Drawing

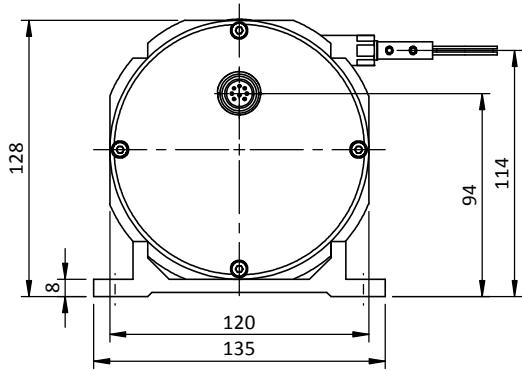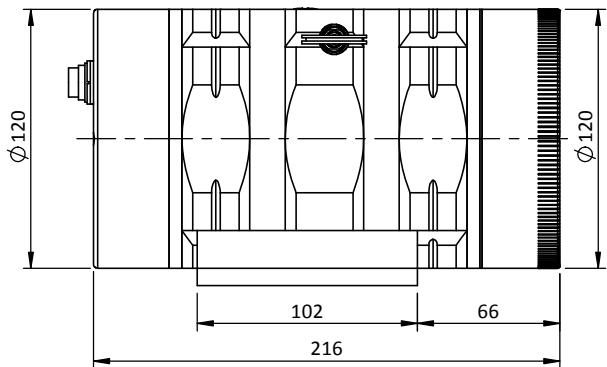


K connection
(PVC cable - 4 wires)

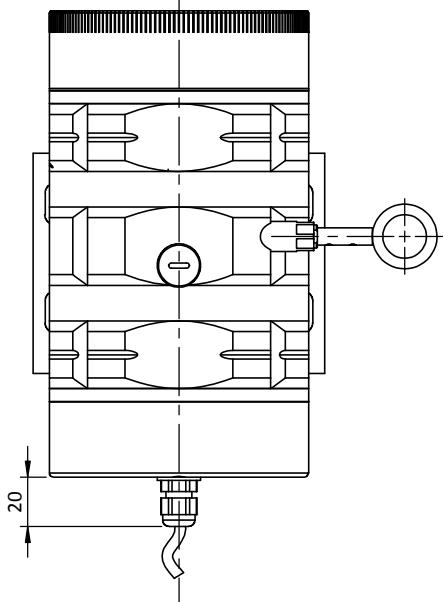

L4 connection
(connector M12 - 4 pin)

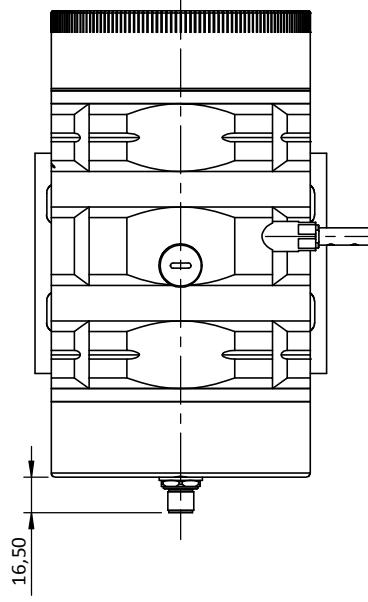

C connection
(Connector M16 - DIN 8 pin)

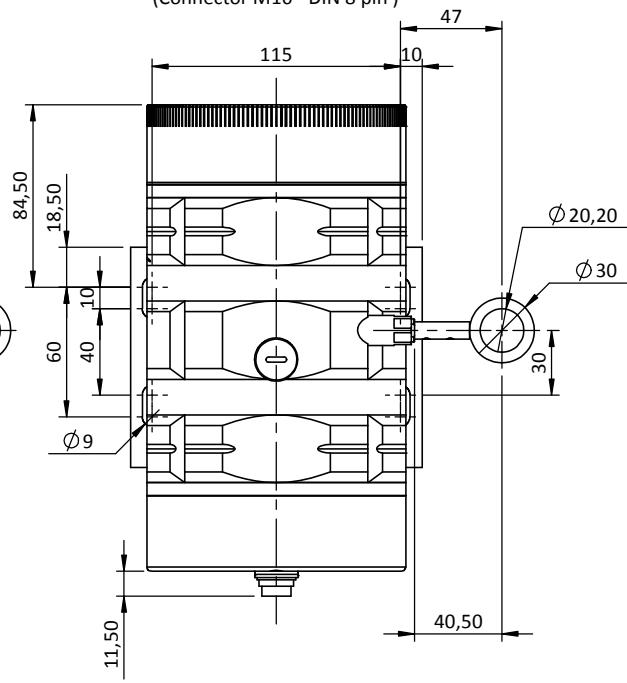

Modular base plate

