


Accumulator charging & testing devices

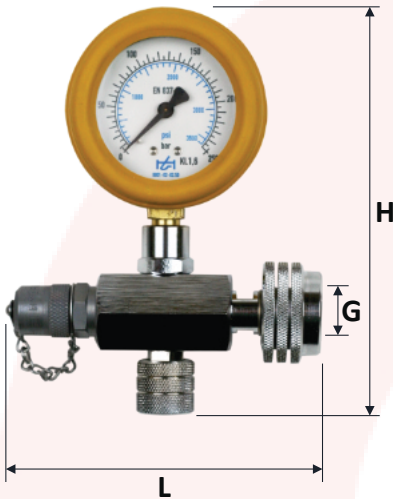

Pressure gauge display range	Measuring connection	Cylinder connection thread G	H (mm)	L (mm)	Part-number
0...250 bar	Minimess® 1620	W 24,32 x 1/14" female	150	123	1087-HYDRO-W24
0...250 bar	Minimess® 1620	5/8" BSP female	150	138	1087-HYDRO-UK

- Charging of the hydraulic accumulator
- Testing and lowering the pressure within the hydraulic accumulator
- Pressure gauge Cl. 1,6 - Ø 63 mm
- Complete measuring equipment kit on request
- Other cylinder & charging connectors available on request

Gas charging & testing device with pressure reducer valve



Secondary adjustment	Pressure gauge display range, accumulator	Cylinder connection thread	Charging connection	Part-number
10...235 bar	0...250 bar	W 24,32 x 1/14" female	Minimess® 1615	5401-02-00.00
10...235 bar	0...250 bar	W 21,8 x 1/14" female	Minimess® 1620	5401-02-02.00

- Filling, adjusting and controlling gas pressure in hydraulic accumulators with nitrogen filling
- Pressure gauge Cl. 1,6 - Ø 63 mm
- Pressure gauge for primary pressure display 0...400 bar
- Complete measuring equipment kit on request
- Other cylinder & charging connectors available on request

DISCOVER MORE AT
HYDROTECHNIK.CO.UK/CHARGING