




**Model:** 3101-16-XX.ORFS

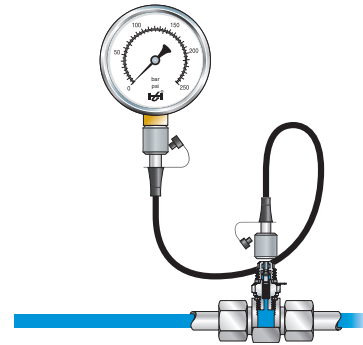

**FEATURES:**

- Test under pressure using Hydrotechnik leak free Minimess® connections up to 630 bar.
- Connect & disconnect under full system pressure. Lifetime leak free guarantee.
- In-line test point tees offer excellent system access versatility.
- Printed logo & contact details on kit box.\*

**KIT CONTENTS**

- 2 x 63mm glycerine filled pressure gauges user selectable up to 700 bar.
- 3 x Minimess® Male/Swivel Female 1620 inline test point adaptors. 9/16", 11/16" & 13/16" ORFS.
- 2 x Minimess® 1620 test points - 7/16" & 9/16" UNF.
- 1 x 1/4" BSP to 1620 gauge adaptor.
- 1 x 630 bar rated Minimess® pressure test hose - 1.5 meters long.

**Order code:**

3101-16- X X .ORFS

Replace X in above code with pressure gauges required from the following options:

- |                 |                  |
|-----------------|------------------|
| 0 = 0 to 7 bar  | 5 = 0 to 100 bar |
| 1 = 0 to 14 bar | 6 = 0 to 170 bar |
| 2 = 0 to 28 bar | 7 = 0 to 280 bar |
| 3 = 0 to 40 bar | 8 = 0 to 400 bar |
| 4 = 0 to 70 bar | 9 = 0 to 700 bar |

*All pressure gauges have dual bar / psi scale. ±1.6% acc.  
Special gauge ranges available on request*

\* Minimum orders of 5 kits.