

Data Loggers, Sensors & Instrumentation



MultiHandy & MultiSystem Measuring Instruments

From 2 to 40 channels



MultiXtend

Adaptor boxes to extend functionality of MultiHandy & MultiSystem Instruments

MultiXtend modules extend the measurement parameters and channels for our MultiHandy or MultiSystem instruments. For seamless data transmission choose our MultiXtend bluetooth module.



KEY FEATURES

- Add Voltage & Current measurement
- Add extra 4-20mA channels
- Add extra frequency channels
- Add Type J, K & PT100 Thermocouple sensorrs
- Bluetooth wireless transmission to PC
- LAN network connection

More measuring choices ...than ever before

FORCE/TORQUE

FLOW

DISPLACEMENT

VIBRATION

VOLTAGE/CURRENT

RPM

PRESSURE

TEMPERATURE



Evaluation and control software

- HYDRcom6 evaluation software
- HYDRlink6 control & recording software
- HYDRcenter firmware update software



More sophisticated and more powerful...

...than ever before



MultiHandy 2025

- 3 channel instrument with text backlit display
- 2 x selectable ISDS, mA, V or pulse inputs
- 1 x differential or Power calculation channel
- Min & Max values
- Memory for five tests with up to 120,000 values per test
- Storage for 5 different test files
- Fast transmission via USB
- Sunlit viewable backlit LCD screen
- Compatible with any third party sensors
- HYDROlink6 Basic analysis & record software for PC



MultiHandy 3020

- 4 channel instrument with text backlit display
- 2 analogue & 1 frequency channel (ISDS or Std.)
- 1 virtual calculation channels (delta p, power etc.)
- Min & Max values
- Storage for 14 different test files
- Memory for 1,000,000 (analogue), 330,000 (frequency) measurement per series
- Fast transmission via USB
- Record from selectable triggered events
- Sunlit viewable backlit LCD screen
- Supplied with HYDROcom6 Advanced software



MultiSystem 4010

- 10 channel instrument with bright colour display
- Graph or text display of measurements
- 3 or 4 analogue & 1 or 2 frequency channels (ISDS or Std.)
- 5 virtual channels (delta, power etc & optional CANbus inputs)
- Digital I/O for external switching or instrument linking
- Min & Max readings
- Record from selectable triggered events
- 2GB internal SD card memory
- Storage for 100 different test files
- 1,000,000 values per series
- Supplied with HYDROcom6 Advanced software



MultiSystem 5060 plus

- 24 Channel instrument with bright colour display
- Graph or text display of measurements
- 6 analogue, 2 x 0.1 ms high speed & 2 frequency channels (ISDS or Std.)
- Reads most industry sensor outputs for true flexibility
- 14 virtual channels (CANbus signals & calculations)
- Digital I/O for external switching or instrument linking
- Min & Max readings
- Record from selectable triggered events
- 2GB internal SD card memory
- USB stick upload or download of tests & settings
- Space for 200 test files
- 2,000,000 measurements per test
- Supplied with HYDROcom6 Advanced software



MultiControl & MultiSystem 8050

- 40 channel instrument with touch screen display or available in "blind" version for operation via PC
- Graph or text display of measurements
- 10 analogue & 2 x 0.1 ms high speed analogue, 4 frequency channels (ISDS or Standard)
- 6,000,000 measurements per tests
- 2 inputs for voltage & current
- Analogue & Digital signal outputs for process control
- 6 or optional 14 virtual channels (CANbus signals, calculation & user defined formulae)
- Min & Max readings
- Record from selectable triggered events
- Large internal memory
- Space for 200 test files
- Supplied with HYDROcom6 Professional software
- Supplied with HYDROlink6 Advanced software (MultiControl 8050)
- Digital I/O for external switching or instrument linking



Universal connectivity as standard:-

0 or 4...20mA • 0...10V • ±10V • 1...5V • 2...10V • 0.5...4.5V • Frequency rate & totalising • CANopen • J1939 • Digital I/O • Free formulae • RS232 • USB • Bluetooth • Ethernet



Pressure Sensors



Options from -1 up to 4000 bar with measuring accuracy of $\pm 0.25\%$ FSD (ISDS)

Robust high quality stainless steel construction with long life repeatability

Scanning rates up to 0.1ms (10kHz)

ISDS versions supplied with calibration certificates as standard



Temperature Sensors



High quality stainless steel sensors for accurate fluid temperature measurements

Hand tightens on to special Minimes 1620 temperature test point

Analogue output with or without ISDS

Also available in hand held surface or immersion versions also with or without ISDS



Displacement Sensors

Compact & robust dynamic string pot requiring no linear guidance

Standard measuring ranges up to 3000mm (higher on request)

Available with analogue output signals

Versions available with self programmable 4-20mA output



Vibration & Accelerometer Sensors

Triaxial vibration sensors for measuring g forces

Measuring ranges from $\pm 2g$ to $\pm 200g$

Magnetic base vibration sensor for measuring frequency of vibrations

Miniature size & IP66 protection



RPM Sensors



Infra red RPM sensors for shaft speed measurement via reflective foils to 10,000 rpm

Available with analogue or frequency options

Magnetic Inductive pickups for gear wheel measurement

Available with frequency output



Circular Gear & Turbine Flow Meters



Robust turbine meters with measuring ranges from 1...600l/min. 420 bar max.

High accuracy gear meters from 0.005...300l/min. 630 bar max.

Available in analogue or frequency signal output with or without ISDS

Accuracy up to $\pm 0.4\%$ & supplied with calibration certificates

Pressure & Temperature test points fitted as standard



Load, Torque, Compression & Tension Sensors

Robust rotating torque measurement transducers from 2.5...500 Nm

Load link tension & compression cell transducers from 1 to 500 tonnes

Low Profile IP67 robust button load cell transducers 0.5...20 tonnes

Standard signal outputs for simple connection to Hydrotechnik instruments



Oil Contamination Particle Counting Sensors

Stylish Particle Monitor with ISO or SAE cleanliness code output

Internal memory up to 3000 readings

Easy connection to MultiSystem 5060plus for real time cleanliness measurement in isolation or with other sensors at one time.

Connect to HYDROcom6 software for PC monitoring & recording



MultiXtend Extension Modules

MultiXtend extension modules enable Hydrotechnik dataloggers to measure direct Voltage, Current, K, J or PT100 thermocouples as well as extending the amount of channels for MultiSystem 5060plus and MultiSystem/MultiControl 8050 instruments. MultiXtend units also enable up to four 5060plus instruments to be connected at the same time for huge measurement possibilities. The range now also includes a new bluetooth module for wireless transmission of recordings in real time to a PC running HYDROcom6 software.



MultiXtend UI for measurement of Voltage (up to $\pm 60v$) or Current (up to $\pm 4A$) with PWM, for use with any Hydrotechnik instrument

MultiXtend f - for additional one or four frequency channels to your Hydrotechnik measuring instruments

MultiXtend A - for additional four 0-20mA or 4-20mA channels for your 5060plus or 8050 instruments

MultiXtend Thermo - for additional one or four extra thermocouple K, J or PT100 inputs to your Hydrotechnik measuring instruments

Connect unlimited numbers of MultiXtend CAN modules in series.

MultiXtend Trigger for connection of up to four 4010 or 5060plus instruments allowing for synchronous recording of all instruments as one unit

MultiXtend Bluetooth for wireless transmission of all measured channels on your 5060plus to a laptop running HYDROcom6. Transmission is almost instantaneous and distances are possible up to 200m apart

Windows Evaluation & Control Software

HYDROcom6 & HYDROlink 6 is the powerful analysis software provided with all Hydrotechnik datalogging instruments. A user friendly environment-making test evaluation, online recording & presentation of data simpler and more powerful than ever before.

HYDROcom 6


Transfer, import and export data

Evaluate, analyse and process test data

Transform data into graphs, tables & histograms

Create test reports, test protocols or quality control reports

HYDROcom6 is available in basic, advanced or professional versions and is free with all Hydrotechnik measuring instruments

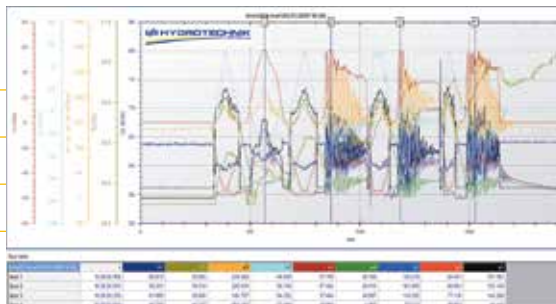

HYDROlink 6

Allows for recording of tests via your PC with flexible display presentation options of required channels

Allows for analysis of saved Hydrotechnik test files even in Basic version

User friendly single button operation or drag & drop functionality, perfect for test bays or end of line production

Advanced version allows for 2 way control of connected 5060plus or 8050 up to 248 channels

HYDROcenter

Hydrotechnik instruments and software stay up to date with latest versions available notified for upgrade when connected to the net.

The user is actively notified of the newest software and firmware updates.



Please see below details to contact us & obtain more information:



Hydrotechnik UK Ltd UK Freephone: **0800 068 4134**
1 Central Park Telephone: **+44 (0) 115 900 3550**
Lenton Lane Fax: **+44 (0) 115 986 8875**
Nottingham Website: **www.hydrotechnik.co.uk**
NG7 2NR Email: **sales@hydrotechnik.co.uk**
UK