

ORFS Inline Test Point Tee Adaptors

ORFS male x swivel female (O-ring face sealing) test point adaptor c/w I 620 Minimess® test point fitted.

In-line SNA Minimess pressure test point adaptors are a simple and easy method of adding test points into a system.

Suitable for OEM build or retro-fitting to existing systems, SNAs fit between hose joints or manifold and hose.


Special configurations are available for OEM applications.

Also available in BSP, JIC & Metric formats.



Features

- Test under pressure using Hydrotechnik leak free minimess connections up to 630 bar
- Connect & disconnect under full system pressure
- In-line test point tees offer excellent system access versatility

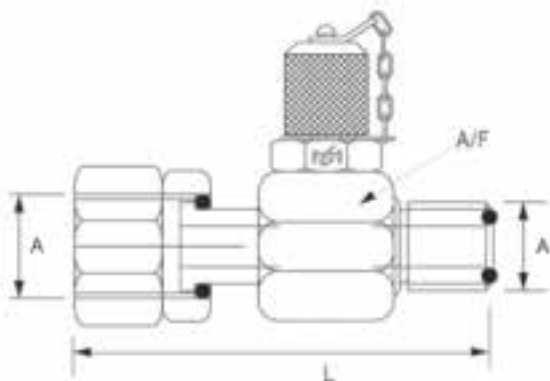

ORFS Format

A	L (mm)	A/F (mm)	Part number
9/16" - 18 UNF	47-55	25.4	SNA70
11/16" - 16" UNF	50-60	25.4	SNA71
13/16" - 16" UNF	56-66	25.4	SNA72
1" - 14 UNF	61-74	28.6	SNA73
1.3/16-12 UNF	65-78	35	SNA74
1.7/16-12 UNF	67-80	41	SNA75

Also available with 1215 & 1615 test points fitted e.g. for 1215 series test point fitted to SNA70 - order as SNA70-1215.