


## Bonded Seals – CETOPS (Recommended in ISO 1179-1973)

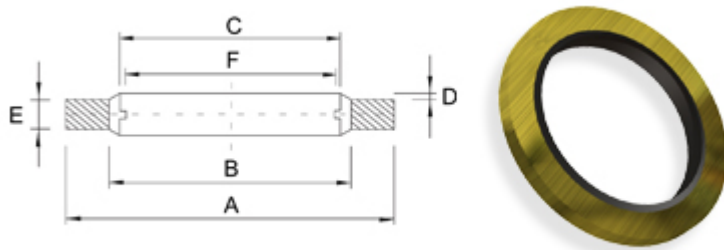

Product Code	Thread size BSP	A +0.00 -0.20	B +0.20 -0.00	C +0.20 -0.00	D +0.25 -0.00	E +0.15 -0.15	Min. burst pressure (BAR)
HT-511	1/4"	18.70	15.75	13.85	0.25	1.25	790
HT-514	3/4"	32.50	29.20	27.30			500
HT-515	1"	39.50	36.10	34.20		2.00	410
HT-516	1.1/4"	49.50	44.70	42.80			500